

Gen IV **ACE** Controller Platform



**ULTIMATE FLEXIBILITY FOR TOTAL
CONTROL**



For over 40 years AIMCO has been working with manufacturers around the world. We are the complete global source for all critical fastening and bolting solutions. AIMCO can effectively and swiftly meet your needs whether you're in Thailand fastening a 3 mm nut at 3 Nm, or in Tennessee, USA torquing the last lug nut. AIMCO provides the tools and solutions, on a global scale, that guarantee the success of your project. It is with great pride that AIMCO can say the products that we manufacture are **MADE IN THE USA.**



AcraDyne GEN IV ACE Controller Platform

AIR • CORDLESS • ELECTRIC

CONTROL • MONITOR • REPORT

AcraDyne's GEN IV ACE controller platform is a single controller platform that commands all transducerized tools in the AIMCO portfolio. You now have the flexibility and freedom to control AcraDyne and Uryu DC, Air, and Battery powered tools.



- **The same, simple programming for all tool types**
- **No additional controller training needed for different platforms (tool type specific knowledge is required)**
- **One common communication for your global data collection, line controls, and fieldbus platforms**

TECHNOLOGY

System Port

- Uses standard USB Type-B cable
- Easily connect to any computer to run software, program your controller, and download data and curves

Tool Connector

- Tool connector varies by tool type

USB Ports (4)

- Backup and Restore
- Update Software
- Download Data and Curves
- Expandable USB Peripherals

Illuminated On/Off Switch

POWER CONNECTOR (110V / 220V)

Fieldbus Platform

- Supports CC-Link, DeviceNET, PROFINET, PROFIBUS, and all platforms offered by



Dual Ethernet Ports

- Enables two networks simultaneously for separate line control and data collection
- Supports any industry standard protocol
- Remote system monitoring, programming, and data download

Serial Port

- Data String Output
- Serial Protocols
- Bar Code Scanners
- Printers

24V I/O (Assignable)

- 8 In/8 Out

Mounting Bracket with Wire and Cable Routing Channels



AIR | CORDLESS | ELECTRIC



The same, simple programming for all tool types, including:

AcraDyne

- DC Tools
- Cordless Battery Tools

Uryu

- Air Powered Tools
- Electric Tools
- Cordless Battery Tools
- No additional controller training needed for different platforms (tool type specific knowledge is required)
- One common communication for your global data collection, line controls, and fieldbus platforms





GEN IV ACE iEC Controller for all AcraDyne DC Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET** TWO PORTS
iEC4E	X	L/D		X	X	X
iEC4EV	X	L/D	X	X	X	X
iEC4EG	X	L/D/G		X	X	X
iEC4EGV	X	L/D/G	X	X	X	X

* Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.

** Ethernet channel supports the Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.



GEN IV ACE iAC Controller for Transducerized Uryu Air Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	SOLENOID SHUT OFF ON BOARD	PROGRAMMABLE REGULATOR ON BOARD	ETHERNET** TWO PORTS
iAC4E	X	L/D		X	X			X
iAC4EV	X	L/D	X	X	X			X
iAC4EG	X	L/D/G		X	X			X
iAC4EGV	X	L/D/G	X	X	X			X
iAC4ES	X	L/D		X	X	X		X
iAC4ESV	X	L/D	X	X	X	X		X
iAC4ESG	X	L/D/G		X	X	X		X
iAC4ESGV	X	L/D/G	X	X	X	X		X
iAC4ESR	X	L/D		X	X	X	X	X
iAC4ESRV	X	L/D	X	X	X	X	X	X
iAC4ESRG	X	L/D/G		X	X	X	X	X
iAC4ESRGV	X	L/D/G	X	X	X	X	X	X

* Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.

** Ethernet channel supports the Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.



GEN IV ACE iBC Controller for all AcraDyne and Uryu Transducerized Battery Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET** TWO PORTS
IBC4E	X	L/D		X	X	X
IBC4EV	X	L/D	X	X	X	X
IBC4EG	X	L/D/G		X	X	X
IBC4EGV	X	L/D/G	X	X	X	X

* For Zigbee option, add -Z to the end of the model number. For fieldbus options, add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other - options available upon request.

** Ethernet channel supports The Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.



GEN IV ACE iPC Controller for Uryu UDP Transducerized DC Pulse Tools

MODEL*	SYSTEM PORT & REMOVABLE MEMORY	LIGHTS (L) LED DISPLAY (D) GRAPH (G)	24V I/O ASSIGNABLE 8 X 8"	SERIAL PORT WITH PROTOCOLS	BACKUP & RESTORE (USB)	ETHERNET** TWO PORTS
iPC4E(1)(2)	X	L/D		X	X	X
iPC4EV(1)(2)	X	L/D	X	X	X	X
iPC4EG(1)(2)	X	L/D/G		X	X	X
iPC4EGV(1)(2)	X	L/D/G	X	X	X	X

* Select (1) for 110V or (2) for 220V operation.

Add (-T) to model number for top exit tool cable option. For fieldbus options add: P = Profibus, C = CC Link, D = DeviceNet, N = ProfiNet. Other fieldbus options available upon request.

** Ethernet channel supports The Open Protocol, Toolsnet, EtherNet/IP, Modbus/TCP, and other protocols.

Continuous Drive



Gen IV ACE Controller Platform

Cordless

Discontinuous Drive



Electric



Electric




Pneumatic



NETWORK CONNECTIVITY



DIMENSIONS

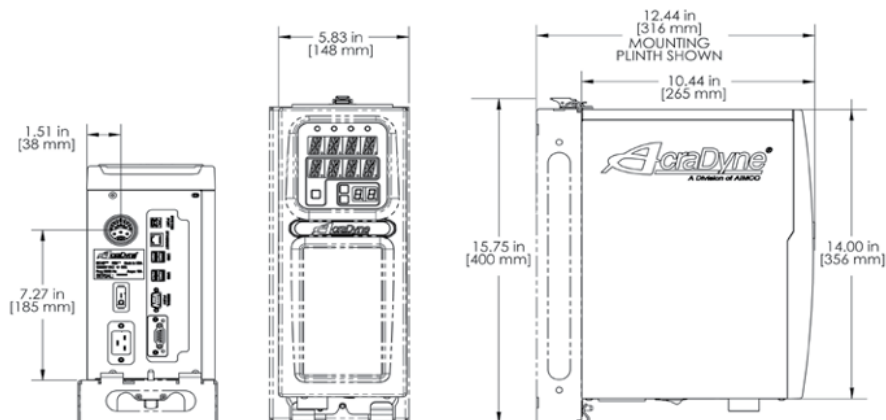


WIDTH	HEIGHT	DEPTH	WEIGHT
5.83 in / 148 mm	15.75 in / 400 mm	12.44 in / 316 mm	15.65 lb / 7.1 kg


SOFTWARE

AcraDyne's software package is on-board every AcraDyne controller and is provided FREE of charge. This comprehensive, user-friendly program allows programming, analysis, and diagnostics.


The software is based on a standard web browser, allowing you to connect the AcraDyne controller with any computer, tablet, or smart device. Connect through Ethernet, USB, or wirelessly via a network connected to both devices.

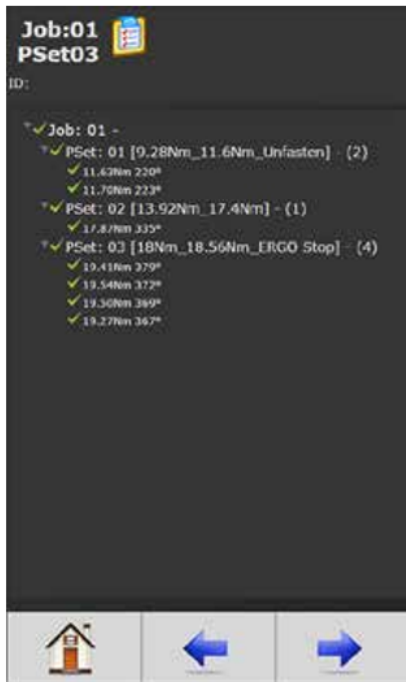

Adding and editing Parameter Sets (256) and Jobs (99) is easy and intuitive in the parameter set up function.

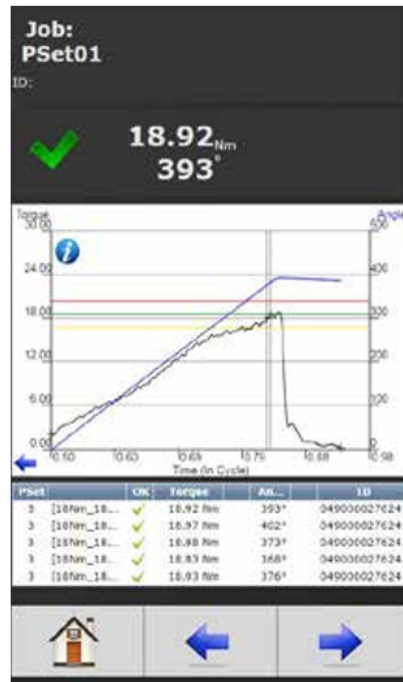

View curve results in real time or view stored results. As many as 20,000 curve results can be stored in memory.

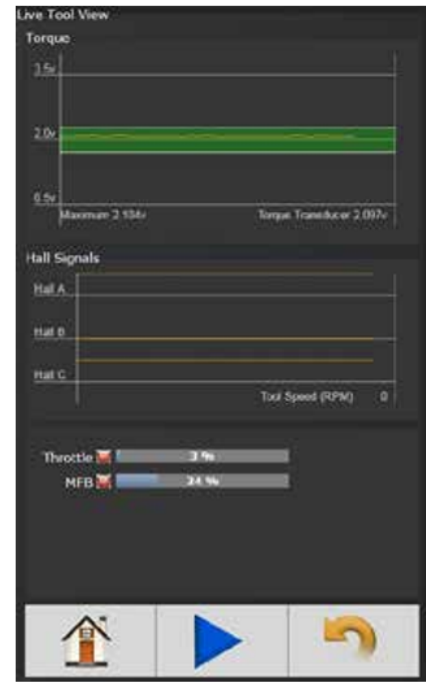

Tool programming and diagnostics for repair, calibration and advanced troubleshooting.



Choose from several run screens that display easy to view, large screen indicators.