

VACUUM GENERATORS

COMPACT EJECTORS - SERIES KEM10

▶ PRODUCT SPECIFICATIONS




▶ Special features


- Complete solution for easiest installation
- Minimum installation size, low weight
- Integrated valve technology and vacuum monitoring
- Wide range of outputs
- Normally open suction valve

▶ EJECTORS/VACUUM GENERATORS


Pumping speed at different vacuum levels

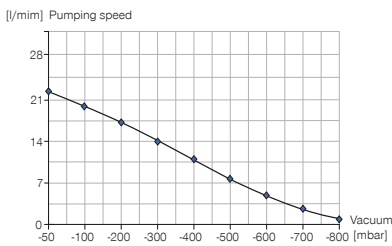

Evacuation time for different vacuum levels

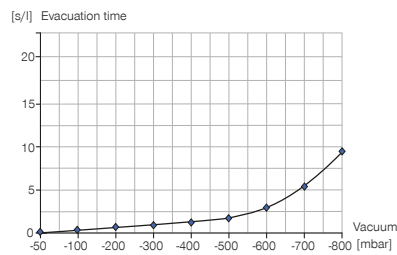

Reachable vacuum of different operating pressure

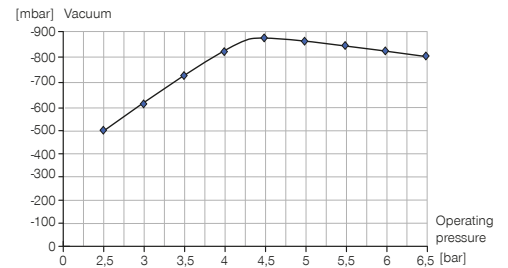

▶ RECOMMENDED ACCESSORIES



Straight Fittings - Quick Connect Style

GVM5



Plug-in connector Straight Cable 5m - Socket M8 (female)

KAG500B4



Connecting cable

ZUB0040

Order no.	Technical Data
	KEM10NOE
Nozzle diameter [mm]	1
Vacuum level [%]	85
Max. suction capacity [l/min]	23
Max. suction capacity [m³/h]	1.4
Air consumption suction [l/min]*	46
Air consumption suction [m³/h]*	2.8
Air consumption blowing [l/min]	26
Noise level (suction) [db(A)]	73
Noise level (free-running) [db(A)]	76
Operating pressure [bar]	4.5
Recommended inner hose Ø compressed air [mm]**	2.0
Recommended inner hose Ø vacuum [mm]**	4.0
Operating temperature [°C]	0 ... +45
Weight [kg]	0.08

*at 5 bar operating pressure

**at max. 2m Length

